


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.2395, EM	10/14/03	BS
B	CORRECT RATING, RFS.2567, EM	11/12/03	BS
C	UPDATE DRAWING, ADD cUL, PROP.65, RFS.4943, DMR	11/11/04	BS
D	UPDATE PACKING, RFS.8799, SO	06/28/06	BS

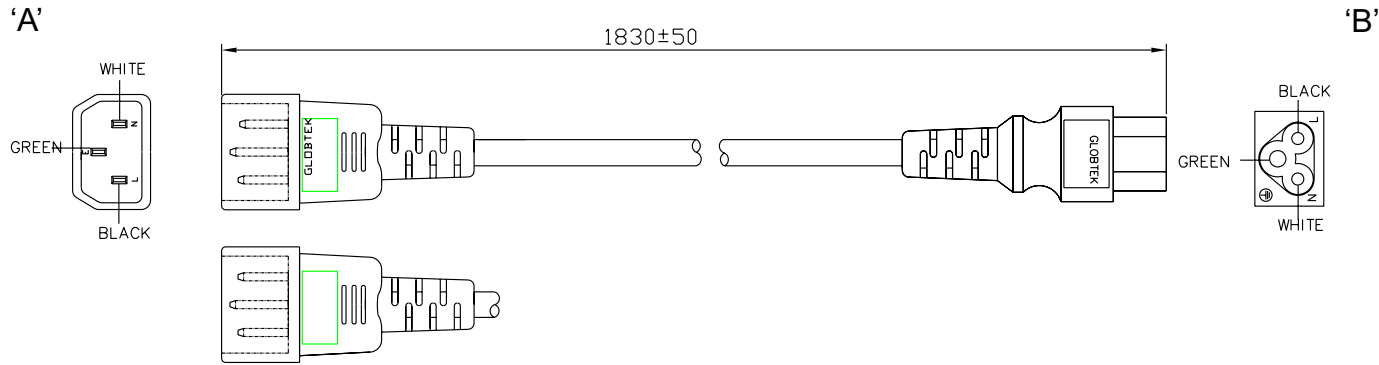

GENERAL SPECIFICATIONS:

RATING: 2.5A / 125V AC
 CABLE TYPE / SIZE: SVT, # 18 AWG, 3 CONDUCTOR
 TEMPERATURE RATING: 105° C
 CONDUCTOR COLORS: BLACK / WHITE / GREEN
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 1830 ± 50 mm
 CABLE OUTER DIAMETER: 6.8 ± 0.1 mm
 END 'A' PLUG: IEC 320 / C14
 END 'B' IEC 320/C5
 APPROVALS PLUG: UL, CSA or cUL
 APPROVALS CONNECTOR: UL, CSA or cUL

PACKING:
 HANKED AND TIED



NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS AND/ OR FILE NUMBERS.



Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111 www.globtek.com
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: EM	DATE: 10/14/03	DWG TITLE: NORTH AMERICAN DETACHABLE CORDSET		
DRAWN: NF	DATE: 10/14/03	FSCN No.: G, CC	SIZE A	MODEL: N / A REV. D
APRVD: BS	DATE: 10/14/03	SCALE: NONE	PART NO: 7051456F0712	SHEET 1/1